
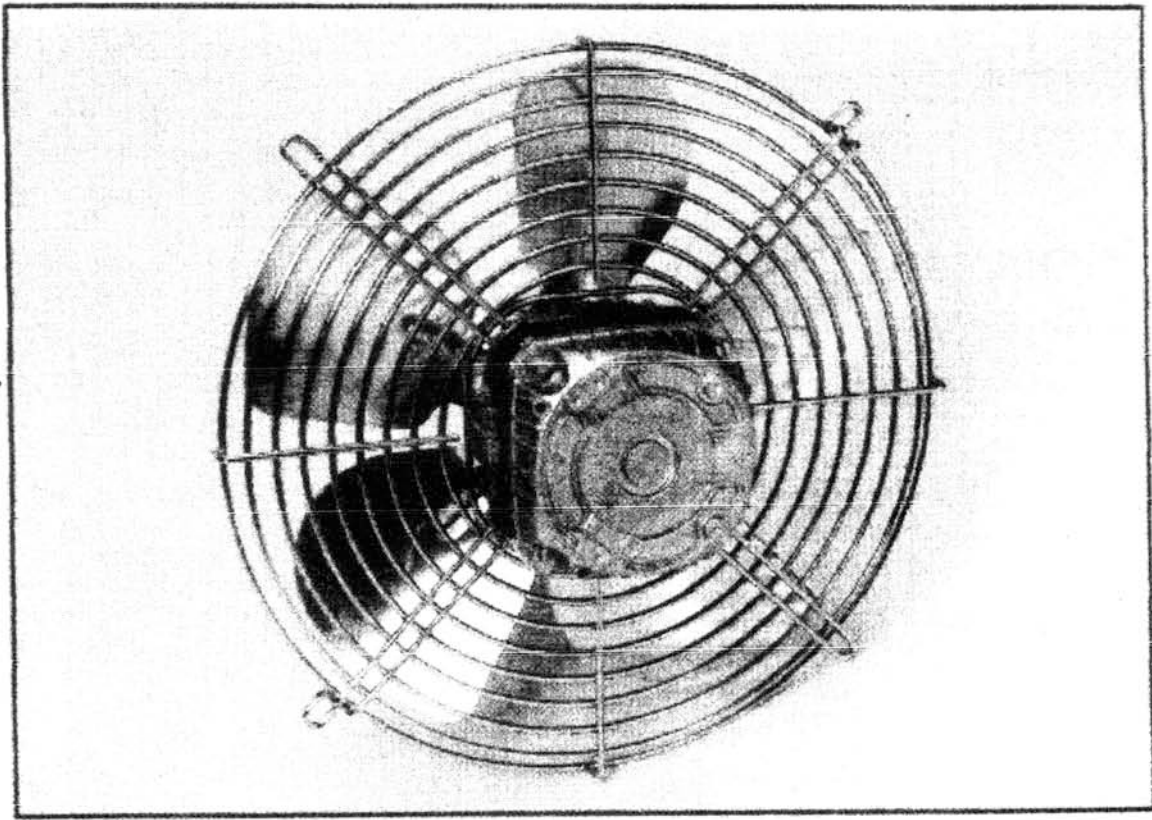



ARO DE AÇO (Zincado)

Steel Fan Ring

Ref.	Potência Power	Ø Vent. Ø Fan	Características Construtivas Construction Features				
	Watt In/Out	mm/ Incl.	P (mm)	D (mm)	N (mm)	F (mm)	G (mm)
A.150	29/5	150/26°	13	164	190	200	97
A.170		170/26°		182	208	223	
A.200	36/5	200/26°		210	236	246	
A.230	40/7	230/26°	19	240	266	276	103
A.250	43/10	250/26°	19	264	290	300	103
	54/12	250/30°					
A.250.C	76/16	250/30°	25	264	290	300	109
A.300.D	70/20	300/20°	32	310	344	356	115
A.300.C	100/25	300/30°	38	310	344	356	122
A.300.C	110/34	300/30°	44	310	344	356	128

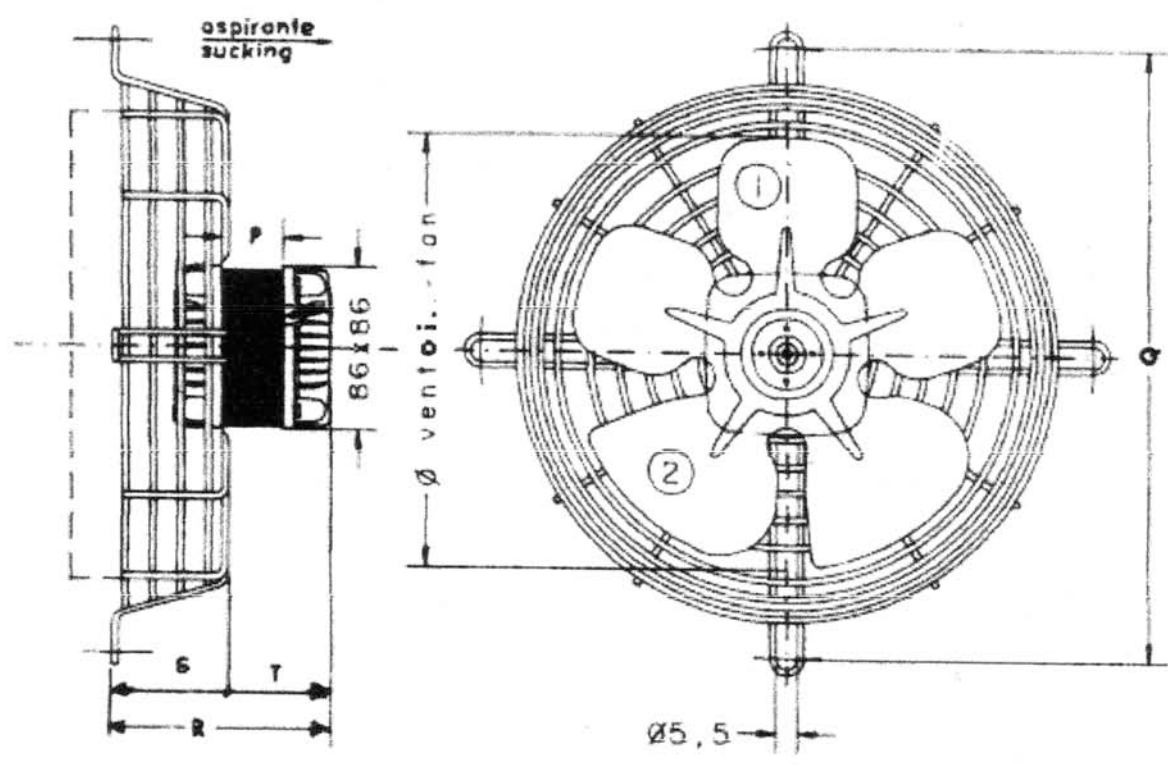

N° 4 RAGGIERE A 90° SOLO PER
IGRIGUE CON #254/300/350

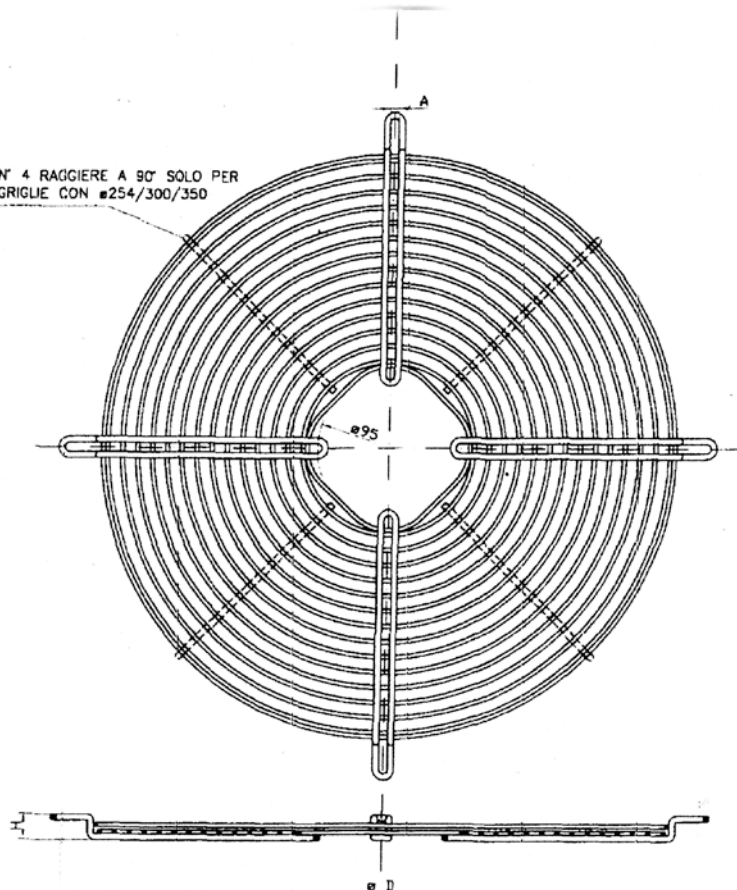

ø VENTOLA	ø D	A	H	TRATTAMENTO	CODICE
154	190	5	11	Zincatura	41.0.154.11
154	190	5	17.5	Zincatura	41.0.154.17
172	208	5	11	Zincatura	41.0.172.11
172	208	5	17.5	Zincatura	41.0.172.17
200	236	5	17.5	Zincatura	41.0.200.17
200	236	5	25	Zincatura	41.0.200.25
230	266	5	25	Zincatura	41.0.230.25
230	266	5	25	Vernic.nera	41.1.230.25
230	294	5	17.5	Zincatura	41.0.230.17
230	294	5	31	Zincatura	41.0.230.31
254	290	5	17.5	Zincatura	41.0.254.17
254	310	5	31	Zincatura	41.0.254.31
254	310	5	35	Zincatura	41.0.254.35
300	344	5	17.5	Zincatura	41.0.300.17
300	344	5	46.5	Zincatura	41.0.300.46
350	410	6	17.5	Zincatura	41.0.350.17
350	410	6	46.5	Zincatura	41.0.350.46
200	300	5	25	Zincatura	41.4.200.03
254	355	5	17,5	Zincatura	41.4.254.04
300	380	5	46,5	Zincatura	41.4.300.05
350	450	6	46,5	Zincatura	41.4.350.06

ALF0003-A